



- 8.1" HD LumiBond® display for better viewing experience
- Getac proprietary SnapBack add-on featuring smart card and contactless RFID reader combo or 2nd expanded battery
- Choice of 1D/2D imager barcode reader, Serial port and LAN port (RJ45)
- MIL-STD-810H and IP65 certified
- Enhanced enterprise security with TPM2.0, Windows disk encryption












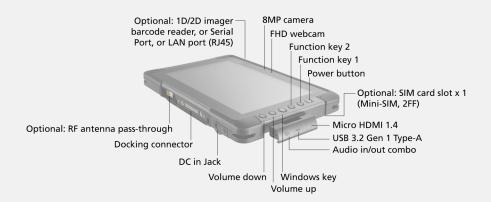

SPECIFICATIONS

Operating System	Windows 10 Pro
Mobile Computing Platform	Intel® Atom Processor x7-Z8750 1.6GHz, burst up to 2.56GHz - 2MB Cache
VGA Controller	Intel [®] HD Graphics
Display	8.1" IPS TFT LCD WXGA (1280 x 800) Protection film 600 nits LumiBond® display with Getac sunlight readable technology
Storage & Memory	4GB LPDDR3 Optional: 8GB LPDDR3 128GB eMMC Optional: 256GB eMMC
Keyboard	Power button 5 tablet programmable buttons
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional: Dual mode touchscreen (multi-touch and digitizer)
Expansion Slots	Optional: 1D/2D imager barcode reader, Serial port, Ethernet [†] Optional: SnapBack add-on: Smart card and HF RFID/NFC reader combo ^{††} Optional: SnapBack add-on: 2 nd expanded battery ^{††} Optional: SnapBack add-on: Smart card and magnetic stripe reader ^{††}
I/O Interface	FHD webcam x 1 8M pixels auto focus rear camera x 1 Audio in/out combo x 1 DC in Jack x 1 USB 3.2 Gen 1 Type-A x 1 Micro HDMI 1.4 x 1 Docking connector x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF) Optional: RF antenna pass-through for GPS, WWAN and WLAN



Communication Interface Intel® Wi-Fi 6 AX200, 802.11ax

Bluetooth (v5.2) iii

Optional: Dedicated GPS

Optional: 4G LTE mobile broadband iv

Optional: 10/100/1000 base-T Ethernet (Occupies expansion

slot)

Security Features TPM 2.0

Optional: SnapBack add-on: Smart card and HF RFID/NFC

combo reader v

Optional: SnapBack add-on: Smart card and magnetic stripe

reader

Power AC adapter (65W, 100-240VAC, 50/60Hz)

Li-ion battery (7.4V, typical 4200mAh; min. 4080mAh)

LifeSupport™ battery swappable technology (only with

SnapBack 2nd expanded battery)

Dimension (W x D x H) & Weight 227 x 151 x 24 mm (8.93" x 5.94" x 0.94")

0.88kg (1.94 lbs) vi

Rugged Features MIL-STD-810H certified

IP65 certified

MIL-STD-461G certified

Vibration & 6ft (1.8m) drop resistant vii

Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division

2, Groups A, B, C, D) viii

Environmental Specifications Temperature ix:

- Operating: -21°C to 50°C / -6°F to 122°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed software Getac Utility

Getac Camera

Getac Barcode Manager ^x

Optional: Absolute Persistence®

Optional software Getac Driving Safety Utility

Getac KeyWedge Barcode Reader Utility

Getac Device Monitoring System (GDMS)

Getac VGPS Utility xi

Accessories

Battery (7.4V, typical 4200mAh; min. 4080mAh)

AC adapter (65W, 100-240VAC) Capacitive stylus with tether

Optional:

Carry bag

Battery (7.4V, typical 4200mAh; min. 4080mAh)

2nd expanded battery (14.4V, 2100mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay expanded battery dock with adapter (Six-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (65W, 100-240VAC)

Office dock AC adapter (90W, 100-240VAC)

MIL-STD-461 AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Digitizer pen

Capacitive stylus with tether

Protection film

Hand strap

Shoulder strap (2-point)

Wrist strap

Vehicle cradle xii

Vehicle dock xii

Office dock

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- I. 1D/2D imager barcode reader, Serial port, and Ethernet, are mutually exclusive options.
- II. All snapBack add-ons are mutually exclusive options.
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Units with 4G LTE option comes with an embedded SIM card slot.
- V. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment coditions.

 IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Available when barcode reader option is selected.
- XI. Models require either embedded or standalone GPS module.
- XII. Havis vehicle dock is e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



	Vehicle Dock	Office Dock
Serial Port	1	-
External VGA	-	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	2	4
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Getac USA

15495 Sand Canyon Ave. Suite 350

Irvine, CA 92618 Tel : 949-681-2900

GetacSales_US@getac.com I www.getac.com/us/

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only,

available specification shall be subjected to quotation by request.